


Настройка PPPoE на Linksys e1200


1. Откройте любой веб-браузер (Google Chrome/Mozilla Firefox/Opera/Яндекс.Браузер/Microsoft Edge/Safari) на устройстве, которое подключено по Wi-Fi или с помощью кабеля к роутеру.



В адресной строке введите адрес 192.168.1.1 (точный адрес указан на корпусе роутера) и нажмите Enter.

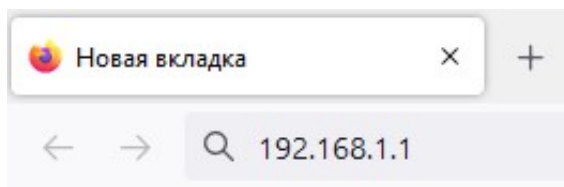

2. На экране может открыться страница авторизации. По умолчанию имя пользователя и пароль — admin. После ввода имени пользователя и пароля нажмите кнопку **Login**.

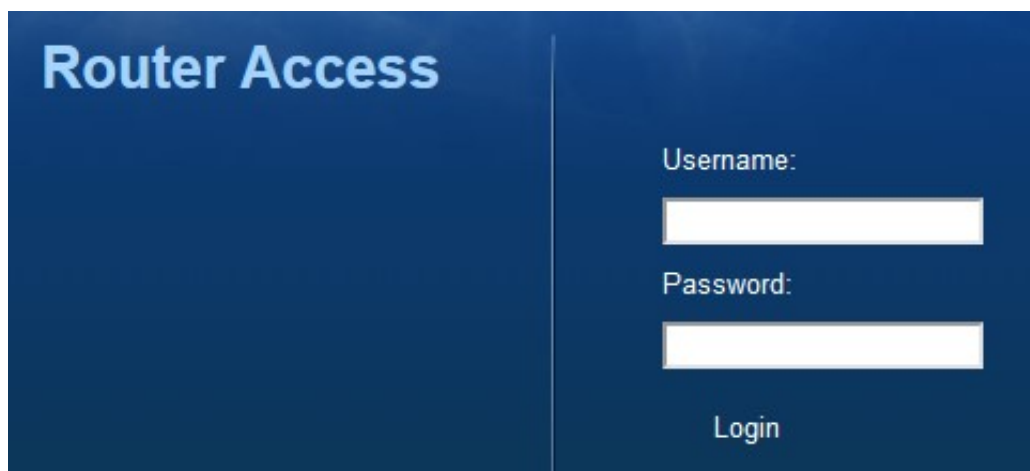

3. После входа вы окажетесь в веб-интерфейсе роутера. Сверху выберите раздел Setup и подраздел Basic Setup. Откроется страница ввода настроек данного подключения.

- Internet Connection Type выберите PPPoE.

- В полях Username и Password введите данные из своего договора.
- Ниже поставьте галочку Keep Alive.

После того, как выполнили все настройки, нажмите внизу кнопку Save Settings.

The screenshot shows the Linksys E1200 Setup page. The 'Setup' tab is selected, and the 'Basic Setup' sub-tab is active. The 'Internet Setup' section is expanded, showing the 'Internet Connection Type' as 'PPPoE'. The 'Username' and 'Password' fields are empty. The 'Service Name (Optional)' field is also empty. The 'Connect on Demand' section has 'Keep Alive' selected, with a 'Redial Period' of 30 seconds. The 'Optional Settings' section is expanded, showing 'Host Name', 'Domain Name', and 'MTU' (Auto, Size: 1492). The 'Network Setup' section is expanded, showing 'Router Address' (IP Address: 192.168.1.1, Subnet Mask: 255.255.255.0, Router Name: Linksys00063) and 'DHCP Server Setting' (DHCP Server: Enabled, Start IP Address: 192.168.1.100, Maximum Number of Users: 50, IP Address Range: 192.168.1.100 to 149, Client Lease Time: 0 minutes, Static DNS 1, 2, 3, and WINS fields are all 0.0.0.0). The 'Time Settings' section is expanded, showing 'Time Zone' as '(GMT-08:00) Pacific Time (USA & Canada)' and 'Automatically adjust clock for daylight saving changes' checked. The 'Reboot' section is expanded, showing a 'Reboot' button. The 'Save Settings' button is highlighted at the bottom.

Linksys E1200 E1200

Setup

Setup | Wireless | Security | Access Policy | Applications & Gaming | Administration | Status

Basic Setup | IPv6 Setup | DDNS | MAC Address Clone | Advanced Routing

Language
Select your language: English

Internet Setup
Internet Connection Type: PPPoE

Username:
Password:
Service Name (Optional):

☐ Connect on Demand: Max Idle Time 15 Minute.
☒ Keep Alive Redial Period 30 Second.

Host Name:
Domain Name:
MTU: Auto Size: 1492

Optional Settings
(required by some Internet Service Providers)

Network Setup
Router Address
IP Address: 192 . 168 . 1 . 1
Subnet Mask: 255.255.255.0
Router Name: Linksys00063

DHCP Server Setting
DHCP Server: ☒ Enabled ☐ Disabled DHCP Reservation
Start IP Address: 192 . 168 . 1 . 100
Maximum Number of Users: 50
IP Address Range: 192 . 168 . 1 . 100 to 149
Client Lease Time: 0 minutes (0 means one day)
Static DNS 1: 0 . 0 . 0 . 0
Static DNS 2: 0 . 0 . 0 . 0
Static DNS 3: 0 . 0 . 0 . 0
WINS: 0 . 0 . 0 . 0

Time Settings
Time Zone: (GMT-08:00) Pacific Time (USA & Canada)
☒ Automatically adjust clock for daylight saving changes.

Reboot
Reboot

Save Settings Cancel Changes

