


Настройка PPPoE на Linksys (Фиолетовый интерфейс)

1. Откройте любой веб-браузер (Google Chrome/Mozilla Firefox/Opera/Яндекс.Браузер/Microsoft Edge/Safari) на устройстве, которое подключено по Wi-Fi или с помощью кабеля к роутеру.



В адресной строке введите адрес 192.168.1.1 (точный адрес указан на корпусе роутера) и нажмите Enter.

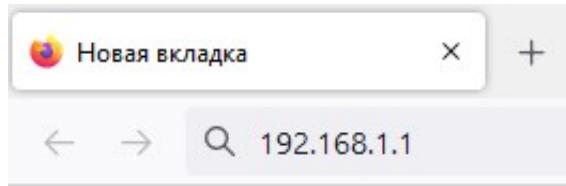

2. На экране может открыться страница авторизации. По умолчанию имя пользователя и пароль — admin. После ввода имени пользователя и пароля нажмите кнопку **Login**.

3. После входа вы окажетесь в веб-интерфейсе роутера. Сверху выберите раздел **Setup** и подраздел **Basic Setup**. Откроется страница ввода настроек данного подключения.

- Internet Connection Type выберите PPPoE. В
- В полях Username и Password введите данные из своего договора.
- Ниже поставьте галочку Keep Alive.

После того, как выполнили все настройки, нажмите внизу кнопку **Save Settings**.

Setup**Setup****Wireless****Security****Storage****Access
Restrictions****Applications &
Gaming****Administration****Status****Basic Setup**

DDNS

MAC Address Clone

Advanced Routing

Language

Select your language

English

[Help...](#)**Internet Setup****Internet Connection Type**

PPPoE

Username:

Password:

Service Name (Optional):

 Connect on Demand: Max Idle Time 15 Minute. Keep Alive Redial Period 30 Second.**Optional Settings
(required by some Internet Service Providers)**

Host Name:

Domain Name:

MTU:

Auto

Size: 1492

Network Setup**Router Address**

IP Address:

192 . 168 . 1 . 1

Subnet Mask:

255.255.255.0

URL Address :

http://WRT610N.com

DHCP Server Setting Enabled Disabled

DHCP Reservation

Start IP Address: 192 . 168 . 1 . 1

Maximum Number of Users: 50

IP Address Range: 192 . 168 . 1 . 1 to 50

Client Lease Time: 0 minutes (0 means one day)

Static DNS 1: 0 . 0 . 0 . 0

Static DNS 2: 0 . 0 . 0 . 0

Static DNS 3: 0 . 0 . 0 . 0

WINS: 0 . 0 . 0 . 0

Time Settings**Time Zone**

(GMT-08:00) Pacific Time (USA & Canada)

 Automatically adjust clock for daylight saving changes.**Save Settings****Cancel Changes****Reboot**